




# HASO

## BROADBAND

Wavefront sensor  
**The Workhorse**

From UV to IR  
Versatile  
Alignment-free



 compatible



# HASO BROADBAND +

**A great choice for almost any lab or industrial application, the HASO BROADBAND is Imagine Optic's most versatile wavefront sensor.**

This generation features the new SpotTracker™ technology. It provides absolute wavefront and tilt information, eliminating alignment requirements for faster and easier implementation.



Compatible with the **Optical Engineer Companion** modular system: easily combine the accessories you need.

## APPLICATIONS

Successfully used in the most demanding applications in optical metrology, microscopy, and laser diagnostics, the HASO BROADBAND performs multiple functions :

- + Quantify the aberrations of an optical system
- + Align the system to ensure that it performs at its best
- + Predict the performance of optical systems in terms of focusing capability or imaging quality
- + Quantify the effects of temperature and gravity on system performance
- + Verify that the optics comply with specifications
- + Measure directly the optical system's wavelength dependency
- + Drive a wavefront corrector to rectify system aberrations
- + Check whether the optical mount overly distorts the optics

## FEATURES

- + Easy wavefront measurement on the whole spectrum of the sensor: 350 - 1100 nm with no wavelength dependency
- + Direct wavefront acquisition of converging and diverging F/5 beams with an accuracy of about  $\lambda/100$  RMS, including astigmatism and high-order aberrations
- + Beam collimation with an accuracy better than 300 m radius of curvature
- + Gaussian beam measurement down to  $1/e^4$  (contrast of 100)



# SPECIFICATIONS\*

## OPERATING SPECS


Aperture dimension	6,9 x 5,1 mm <sup>2</sup>
Number of microlenses	68 x 50
Maximum acquisition frequency	58 Hz (USB 3.0) or 30 Hz (with GigE converter)
Calibrated wavelength range	350 - 1100 nm
Minimum power	0,15 nW
External trigger	TTL signal
Operating system	Windows 10 & 11

## OPTICAL SPECS

Repeatability	< $\lambda/200$ RMS
Absolute wavefront measurement accuracy	$\leq 6$ nm RMS
• $\lambda$ between 350-600 nm	$\sim \lambda/100$ RMS
• $\lambda$ between 600-1100 nm	$\sim 100 \mu\text{m}$
Spatial sampling	$\pm 0,008$ m to $\pm \infty$
Local radius of curvature dynamic range	


## MISC

Dimensions (Height x Width x Length)	42 x 47 x 60 mm <sup>3</sup> (USB 3.0)
Weight	200 g
Working temperature	15 - 30 °C
Interface	USB 3.0 or optional GigE converter
Power consumption	3,1 W

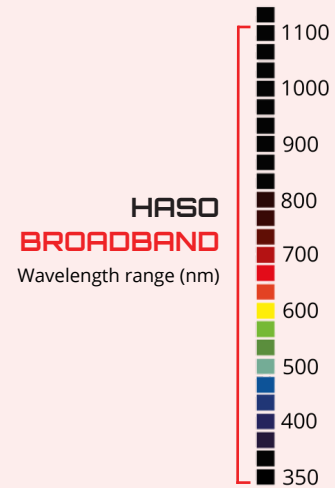



## HASO BROADBAND

Dynamic range at  $\lambda = 635$  nm

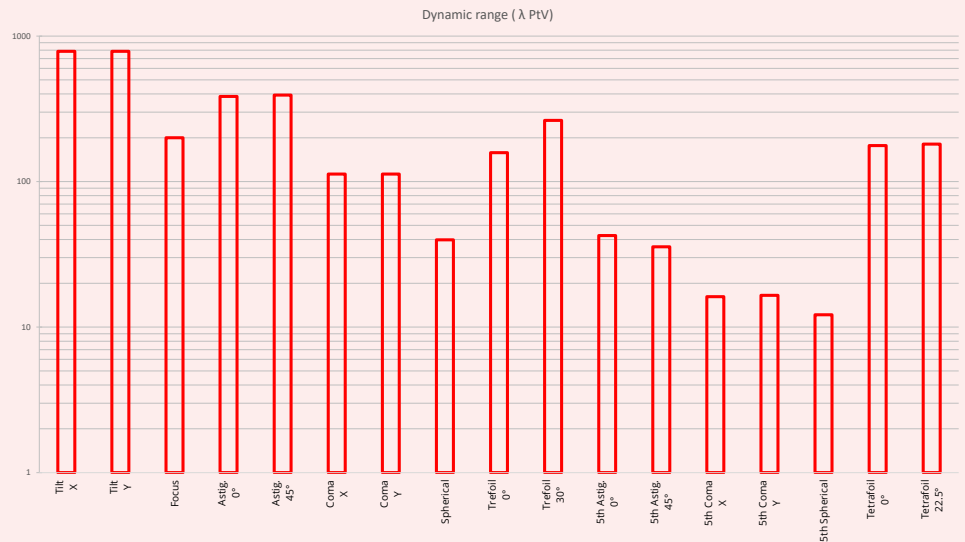

\*Subject to changes without further notice

## DIMENSIONS\*\* (mm)

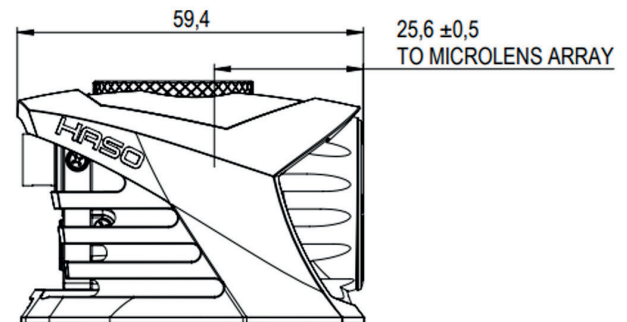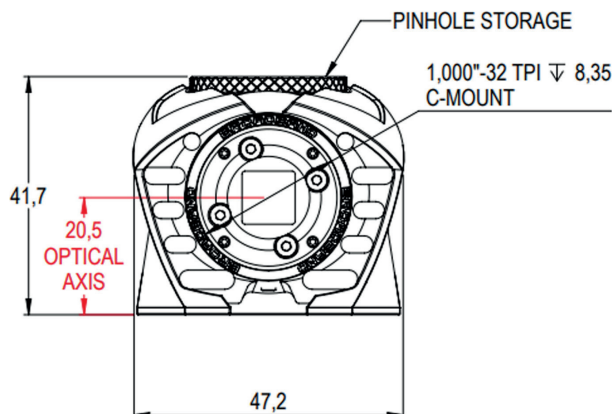

\*\*USB 3.0 model

# SOFTWARE


## WAVEVIEW™ Metrology Software

WAVEVIEW™ is the most advanced wavefront measurement and analysis software.

It offers more than 150 features and tools optimized for a wide range of highly demanding applications.

### Options :

- + Extensions for PSF, MTF, M<sup>2</sup> and Strehl ratio
- + Optional SDK in C/C++, LabVIEW and Python

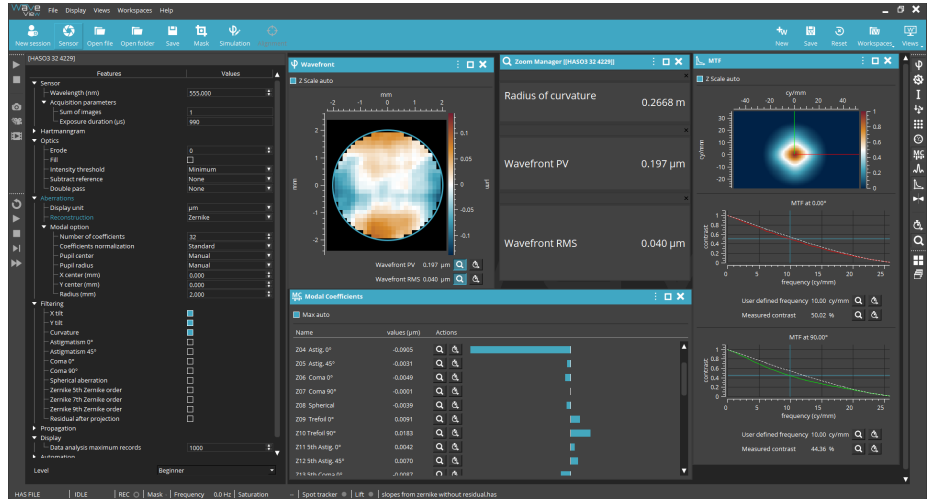


## WAVETUNE™ Adaptive Optics Software

WAVETUNE™ is a unique software that seamlessly combines wavefront measurement and correction features with extensive instrument diagnostics.

It is perfectly adapted to our HASO wavefront sensors, ILAO STAR, MIRAO and mu-DM deformable mirrors, as well as to a wide range of active components.

### Options :

- + Optional SDK in C/C++, LabVIEW and Python

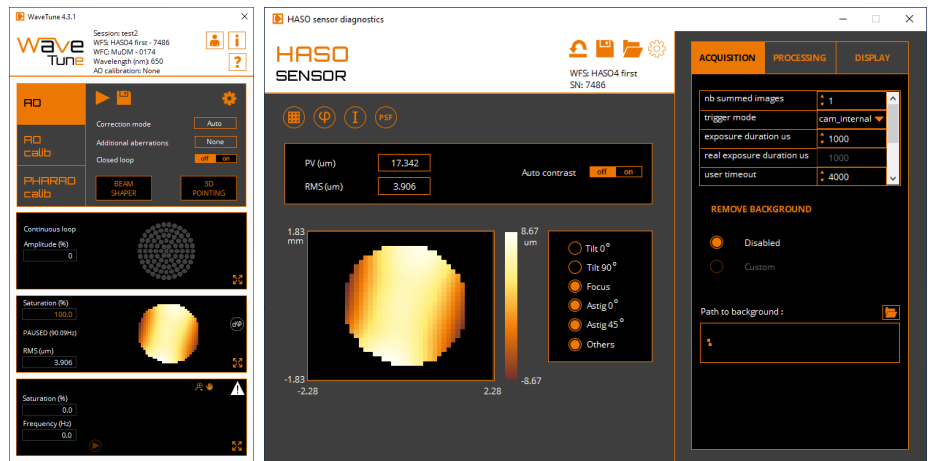

## CONTACT US

**Imagine Optic Headquarters**  
 18, rue Charles de Gaulle  
 91400 ORSAY · France  
 Phone +33 (0)1 64 86 15 60  
 sales@imagine-optic.com  
 www.imagine-optic.com

